

SU917 Digital Projector




Features

- High Brightness 5000 ANSI Lumen
- High Contrast Ratio 13000:1
- Native WUXGA resolution
- Vertical lens shift
- Vertical and Horizontal Keystone
- Corner fit for geometry correction

Box Contents

- Lens Cover
- Remote Control w/ Battery
- Power Cord (by region)
- User Manual CD
- Quick Start Guide
- VGA Cable

Dimension

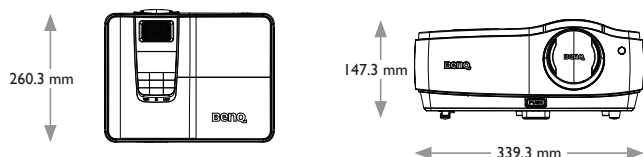


Optional Accessories

- Spare Lamp Kit 5J.JCT05.001
- Ceiling Mount..... 5J.JAM10.001
- 3D Glasses..... 5J.J9H25.001
- Carry bag..... 5J.J5V09.001



Because it matters

Input and Output Terminals

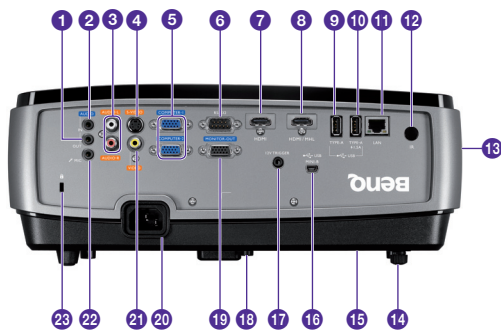

- 1 Audio output jack
- 2 Audio input jack
- 3 Audio (L/R) input jack
- 4 S-Video input jack
- 5 RGB (PC)/Component video (YPbPr/YCbCr) signal input jack
- 6 RS-232 control port
- 7 HDMI input jack
- 8 HDMI/MHL input jack
- 9 USB type A jack
- 10 USB type A/I.5A jack
- 11 RJ45 LAN input jack
- 12 Rear IR remote sensor
- 13 Ventilation holes (exhaust)
- 14 Rear adjuster foot
- 15 Ceiling mount holes
- 16 USB mini-B jack
- 17 12V DC output terminal Used to trigger external devices such as anelectric screen or light control, etc. Consult your dealer for how to connect these devices.
- 18 Quick-release adjuster foot
- 19 RGB signal output jack
- 20 AC power cord inlet
- 21 Video input jack
- 22 Microphone input jack
- 23 Kensington anti-theft lock slot

Product Specifications

Projection System	DLP	
Native Resolution	WUXGA (1920x1200)	
Brightness	5000 AL	
Contrast Ratio	13000:1	
Display Color	1.07 Billion Colors	
Lens	F=2.42~2.95, f=20.77~31.13mm	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Throw Ratio	1.37~2.05 (60" @1.8m)	
Image Size (Diagonal)	60"~300"	
Zoom Ratio	1.5:1	
Lamp Type	310W	
Lamp(Normal/Economic/SmartEco Mode)*	2300/3000/3500 hours	
Keystone Adjustment	2D, Horizontal +/- 30 degrees, Vertical +/- 30 degrees	
Lines shift range	120%-130%	
Projection Offset	VGA(640 x 480) to WUXGA(1920 x 1200)*RB-Reduced blanking	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Share with component)
	Monitor out (D-sub 15pin)	x 1
	CompositeVideo in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI	x1
	HDMI/MHL	x1 (shared with HDMI)
	Audio in (RCA)	x 1
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Speaker	10W x 1
	Microphone (Mini Jack)	x 1
	USB (Type mini B)	x1 (Download & page/down)
	USB (Type A)	x 2 (USB power supply & Wireless Display <AP mode>)
	LAN (RJ45)	x 1
Dimensions	Dimensions(W x H x D)	339.3 x 260.3 x 147.3 mm
	Weight	4.2kg (9.26lbs)
	Power Supply	AC100 to 240V, 50 to 60 Hz
	Power Consumption	380W(typical), Standby<0.5W
Audible Noise	36/33 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	

* Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9HJCT77.35E
EAN Code	471 8755 05366 5
Dimensions Single Carton (cm)	39 * 20 * 33.6
Carton Weight (kg)	4,9
Pallet Qty	60



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax : +31 88 8889299

© 2014 BenQ Corp. Specification may vary by region, please visit your local stores for details.
Actual product's features and specifications are subject to change without notice.
This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301

